

XS3 PRO

**3-Channel, 10-Model Memory
Synthesized FM Computer
Racing System**



JR RACING

Table of Contents

Table of Contents	2	Function Mode.....	21
Introduction	2	Steering Master Rate	22
XS3 PRO Quick Start Setup	3	Throttle Deadband	23
Synthesized TX Channel Select	3	Exponential Function	24
Synthesized RX Channel Select	3	End-Point Adjustment	25
Servo Reversing	3	Programmable Mixing	27
End-Point (Travel) Adjustment.....	4	Lap-Timer	28
Direct Trim Access	5	Sub-Trim	29
Servo Trim Adjustment	5	Servo Reversing	30
System Features.....	6	Accessing the Direct Trim Mode	31
System Specifications.....	6	Steering Trim	32
Control Identification and Location.....	7	Throttle Trim	32
RC Safety Precautions.....	8	Grip Lever B: Steering Dual-Rate	
Charging Jack.....	8	Trim Adjustment.....	33
Steering Tension Adjustment	8	Grip Lever A: Brake End-Point	
Back Trigger Adjustment	9	Adjustment/Auxiliary Channel 3 Access	34
Foam Cushion Grip.....	9	XS3 PRO Data Sheet.....	35
Receiver/Servo Connections and Installation.....	10	Frequency Chart.....	38
Operating Your Model.....	11	Warranty and Service Information.....	39
Servo Layout.....	12		
Key Input and Display	12		
Display Screens	13		
System Mode.....	14		
Model Select	15		
Synthesized Channel Select.....	15		
Model Name Entry.....	16		
Frame Rate Select.....	17		
Auxiliary Channel 3 Function Select	18		
Grip Button C Function Select.....	19		
Data Reset	20		
Copy Model Data.....	20		

Introduction

Thank you for purchasing the JR Racing XS3 PRO Synthesized FM 3-Channel Radio system. You have likely chosen the XS3 PRO radio system for its synthesized PLL channel select capabilities found on both the transmitter and the receiver, eliminating the need for crystals and providing you with access to virtually all available channels on 27MHz or 75MHz.

This system has been designed to provide RC racers with a high quality, user-friendly radio system that can be relied upon year after year, race after race. The XS3 PRO's grip dial accessible auxiliary third channel is ideal for use as a mixture channel in gas boats or as a transmission shifter for vehicles such as the Traxxas® T-Maxx. It is important

that you carefully read this manual before attempting to operate your XS3 PRO system.

For your convenience, blank data sheets have been included in the back of this manual. Once you have input all the necessary data for a particular model into your transmitter, we strongly recommend that you immediately write that information down on the data sheet provided. This will insure that in the rare case of a memory failure, you will not lose the models' setup data.



For those who would like to get out to the track quickly with just the basic radio setup, please refer to the Quick Start section that follows.

XS3 PRO Quick Start Setup

Included in this manual are in-depth instructions detailing all the steps and procedures needed to correctly program each of the XS3 PRO's features. Quick Start covers the basic programming information necessary to get you to the track fast. Later, when you want to learn more about the specific features of the XS3 PRO, refer to the appropriate page(s) in this manual for more detailed programming information.

Note: If the Auxiliary Channel 3 is required, refer to the Auxiliary Channel 3 System Mode (page 18) for instructions.

Synthesized TX Channel Select

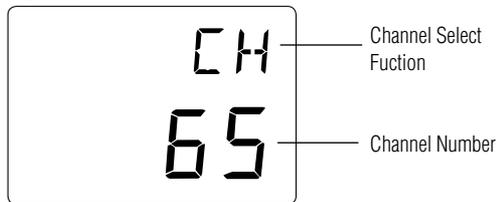

1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn the transmitter power switch on to enter System mode.



3. Press the *Scroll* key until "CH" appears on the screen.





4. Press the *Increase* or *Decrease* key to select the desired transmitting channel number (1–6) on 27MHz or (61–90) on 75MHz.

Note: Your XS3 PRO radio system will only operate either on 27MHz or 75MHz, depending on the model purchased, not both. While in System mode, there is no RF output being generated by the XS3 PRO, enabling you to safely make the appropriate channel selection. You must turn the transmitter off and then back on to enable RF output.

Synthesized RX Channel Select

1. Determine the frequency band and channels available marked next to the rotary dial matches the transmitter.
2. Set the channel on the RS310 receiver to match the XS3 PRO transmitter by adjusting the ten position rotary switches using the supplied tuning screwdriver until they point to the corresponding channel numbers.
 - To set a 75MHz receiver to channel 78, rotate the first rotary switch to the "7" position and the second rotary switch to the "8" position.
 - 27Mhz receivers will only have one rotary switch for accessing the channels 1–6. Use this single switch to select the desired channel.

Servo Reversing

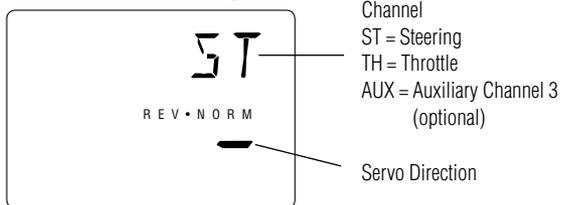

1. With the transmitter power switch on, press the *Scroll* key to enter the Function mode.



2. Press the *Scroll* key until "REV·NORM" appears on the screen. The "ST" indicates the steering servo reversing screen.




3. Press the *Increase* or *Decrease* key to move the cursor to the desired servo direction (REV·NORM).



4. Press the *Channel* key once to access the throttle servo reversing screen.
5. To select the direction of the throttle servo, repeat Step 3 above.
6. Repeat Steps 2 and 3 to adjust Auxiliary Channel 3 if needed.

XS3 PRO Quick Start Continued


End-Point (Travel) Adjustment

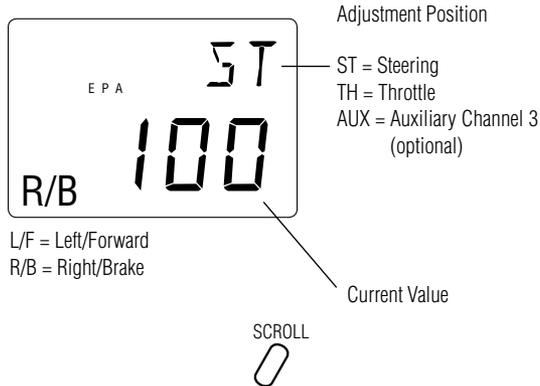

1. From the Servo Reverse function, press the *Scroll* key four times to access the End-Point (Travel) Adjustment function (the EPA screen with "ST" will appear).

Steering Adjustment

2. Rotate the steering wheel in the desired direction (left or right) to be adjusted.



3. Press the *Increase* or *Decrease* keys to select the desired travel value.

Throttle Adjustment



4. Press the *Channel* key once. "TH" will appear on the screen.



5. Pull the trigger forward or push the trigger for brake adjustment.
6. Press the *Increase* or *Decrease* keys to select the desired travel value.

Auxiliary Channel 3 Adjustment


If a third channel is not required, proceed to Step 9.



7. Press the *Channel* key once. "AUX" will appear on the screen.







8. Press the *Increase* or *Decrease* keys to select the desired travel value.



9. Press the *Scroll* and *Channel* keys at the same time to exit the function mode.

Direct Trim Access

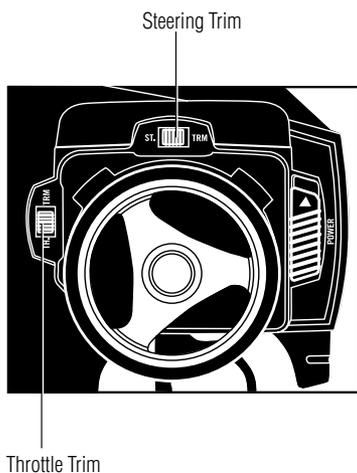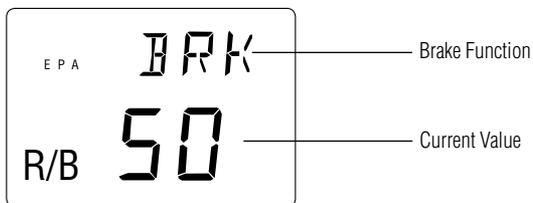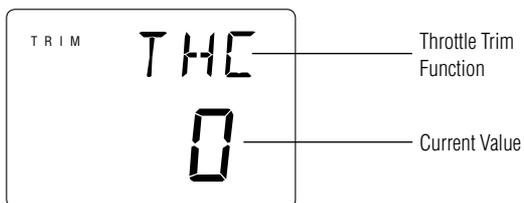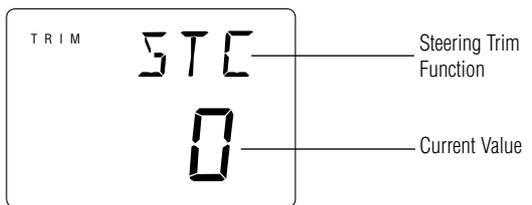

Servo Trim Adjustment

Steering


1. With the transmitter power switch on, move the digital steering trim lever in the desired position to be adjusted. The steering trim value screen will appear automatically.

Throttle

2. With the transmitter power switch on, move the digital throttle trim lever in the desired position to be adjusted. The throttle trim value screen will appear automatically.

Auxiliary Channel 3 (If Active)

3. With the transmitter power switch on, move the digital grip lever A in the desired position to be adjusted. The Auxiliary Channel 3 value screen will appear automatically.

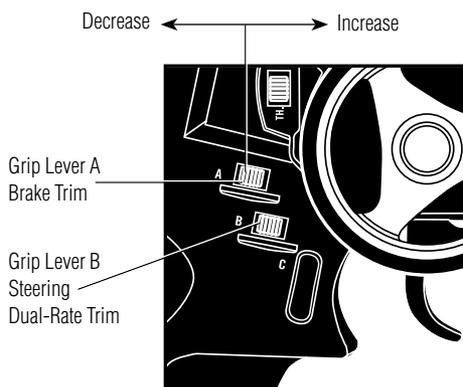

System Features

Transmitter

- 3 channels
- Synthesized PLL Channel Selection via software
- FM modulation
- Easy-to-read LCD graphics display
- 10-model memory
- 3-character model name entry
- Electronic digital trim levers for throttle and steering
- Two assignable electronic grip levers
- Auxiliary third channel accessible through Grip Lever A
- Direct display trim functions
- Servo reversing
- Sub-trim
- Steering dual-rate
- Exponential (steering and throttle)
- Steering end-point adjustment (two points: left and right)
- Brake/throttle end-point adjustment
- Throttle deadband adjustment
- 50-lap timer
- Low-battery alarm
- Charge jack receptacle (rechargeable batteries not included; order JRPB958)

RS310 Receiver

- 3 channels
- Synthesized PLL Channel Selection
- FM modulation
- 27MHz/75MHz available
- Patented ABC&W interference technology

Z590M Servo

- Metal gears for durability
- Great high-torque car/buggy steering servo
- Indirect drive feedback potentiometer for additional vibration protection
- Surface Mount Technology (SMT)

Z270 Servo

- Low current drain
- Indirect drive feedback potentiometer for additional vibration protection
- Surface Mount Technology (SMT)
- Durable nylon gear train

System Specifications

Components

Transmitter	XS3 PRO
Receiver	RS310
Servos	Z590M x 1 Z270 x 1
Accessories	Switch harness with battery case, servo accessories (for each servo), instruction manual

XS3 PRO Transmitter

Model number	XS3 PRO
Encoder	3-channel computer system
RF output	27MHz/75MHz synthesized
Modulation	FM
Output power	130 mW
Current Drain	180 mA
Power source	1.5V x 8 dry cell (1.2V x 8 Ni-Cd optional)
Output pulse	1000–2000 (1500 neutral)

RS310 Synthesized Receiver

Model number	RS310
Type	3-channel, FM, ABC&W circuitry
Frequency	27MHz/75MHz
Sensitivity	5 μ V/m
Selectivity	8 KHz/50 dB
Weight	.63 ounces
Size (LxWxH)	1.49" x 1.14" x 0.63"
Receiver Antenna	20"
Power supply	4.8–6.0V DC
Channel selection	Rotary dial

Z270 Servo

Torque	49 ounce inch (@6.0V)
Speed	.19 sec/60° (@6.0V)
Weight	1.50 ounces
Size (WxLxH)	0.73" x 1.51" x 1.37"
Motor	3-pole ferrite
Gears	Nylon


Z590M Servo

Torque	85 ounce inch (@6.0V)
Speed	.15 sec/60° (@6.0V)
Weight	1.6 ounces
Size (WxLxH)	0.73" x 1.55" x 1.46"
Motor	3-pole ferrite
Gears	Metal

Optional (not included)

JRPB958	Tx NiCD Battery (700Mah)
JRPC222	Tx/Rx Charger

Control Identification and Location

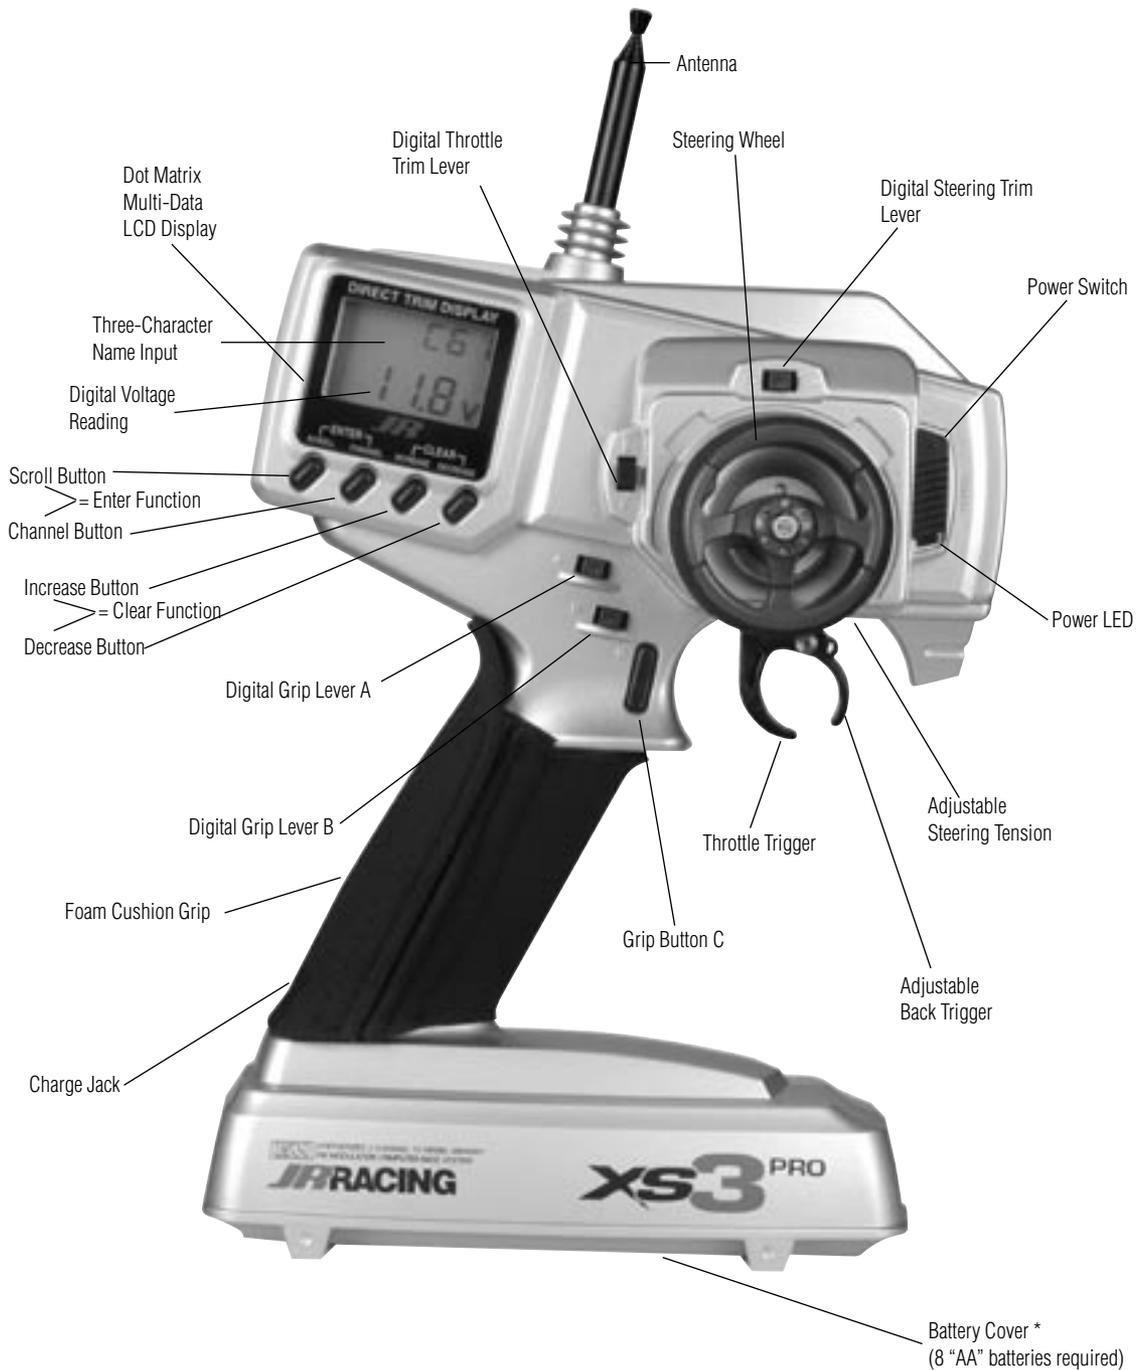

*To remove battery cover, press down on the arrow and push the cover in the direction of the arrow. Remove the battery case and install 8 "AA" batteries in the direction shown as molded into the battery case. If transmitter voltage fails to register, check for correct battery installation and voltage.

RC Safety Precautions

1. Radio control models are not toys. They are capable of inflicting serious injury to people and property. Use caution at all times when operating your model.
2. You are responsible for the safe operation of your RC model. You must properly install, test and operate your model with a clear sense of that responsibility. Do not take risks that might endanger yourself or others.
3. Running an RC car in the streets is very dangerous to both drivers and models. Avoid running your model in areas occupied by full-size automobiles. To locate areas where you can safely operate your model, contact your local hobby shop for RC tracks or clubs in your area.
4. When running an RC boat, keep it away from any swimmers, full-size boats and wildlife. Also, watch carefully for fishing lines that may get tangled in the propeller.
5. Before operating your model, make sure your frequency is clear. If someone else is operating on the same frequency, both models will go out of control, possibly causing damage to the models, as well as others.
6. If at any time while operating your RC model you sense abnormal model functioning, end your operation immediately. Do not operate your model again until you are certain the problem has been corrected.


Caution: Control of your model is impossible without sufficient voltage for the transmitter and receiver. A weak transmitter battery will decrease your range of operation, and a weak receiver battery will slow servo movement and decrease your range of operation. Check your receiver pack voltage often to avoid losing control of your model. When using a model that operates both the electric motor and the receiver from the same battery, you should discontinue use when the top speed sharply decreases or you'll quickly lose control of your model. For safe and reliable performance of your RC model, please carefully read and follow the guidelines below.

Charging Jack

Located on the left-hand side of the transmitter is the charging jack that accepts only JR wall chargers. Please do not attempt to use any other brand of wall charger, as it may be reverse polarity and can cause damage to your system. Only use the JR wall charger (JRPC222) when the XS3 PRO is equipped with rechargeable Ni-Cd batteries (JRPB958, available separately).

JR TRANSMITTER CHARGE JACK POLARITY: 

Charger Pigtail For Transmitter



Steering Tension Adjustment

Steering tension is adjustable via the recessed screw located beneath the steering wheel (see page 7 for exact location). Turning the screw clockwise increases the steering tension.

Back Trigger Adjustment

Back trigger adjustment is possible on the XS3 PRO by loosening the Phillips screw located on the back of the trigger. After you have placed the back trigger in your desired position, be sure to tighten the screw before using the transmitter.



Foam Cushion Grip

For added comfort, your XS3 PRO is supplied with a foam cushion grip. It is secured with a hook and loop type fastener and may be removed as needed.



Receiver/Servo Connections and Installation

Your XS3 PRO is supplied with JR's RS310 receiver. The RS310 receiver is NOT equipped with battery eliminating circuitry (BEC) as found in some model JR receivers such as the RS300, R135, and R133 receivers. DO NOT use more than 6.0V (volts) from a 4-cell dry-cell battery pack or 5-cells from a NiCD/NiMH receiver pack to power the receiver. Supplying a voltage higher than 6.0V may burn-up or destroy your receiver and/or servo. Use only a 4.8V-6.0V (4- or 5-cell) battery pack or electronic speed control designed to supply the proper operating voltage to the receiver. If you will be using a digital servo, or want high performance, it is important that you use a 5-cell NiCd or NiMH receiver battery pack when an electronic speed control does not power the radio system.

Attention: Make sure the male and female connectors have the correct polarity (+/-) before connecting. The

servo lead and receiver case are molded so that the lead can only be inserted correctly in one direction. Be sure to orient the servo plug correctly for proper insertion.

You may use a separate receiver battery to power the receiver (such as for some electric boats or in gas-powered vehicles). A Ni-Cd pack plugged into the battery socket on your receiver will operate your receiver. You can also use alkaline batteries with the included battery box.

If you use a mechanical speed controller, please make sure to use the supplied battery box. See Figure A below for a typical setup. Most electronic speed controllers are set up for BEC operation and plug directly into your receiver (Figure B). See Figure B for a typical setup and check your speed controller's manual for correct installation.

Figure A – Connections to receiver with mechanical speed controller. Battery and speed controller are not included in the radio set.


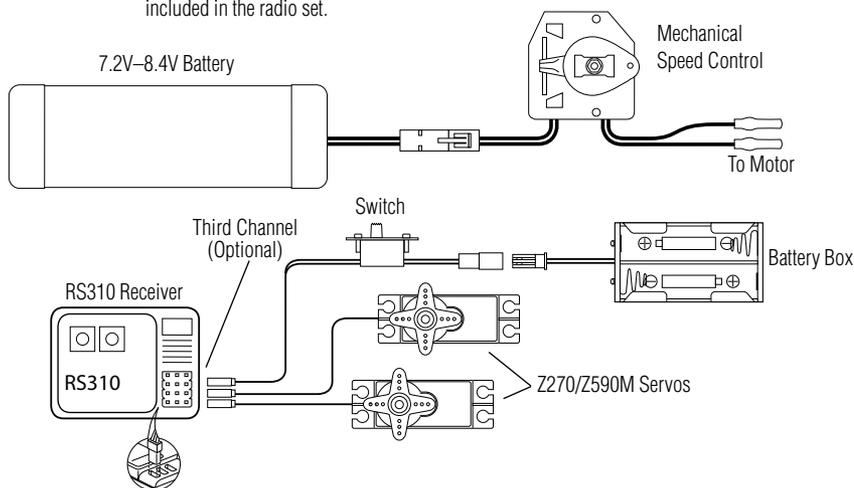


Figure B – Connections to receiver with electronic speed controller. Battery and speed controller are not included in the radio set.

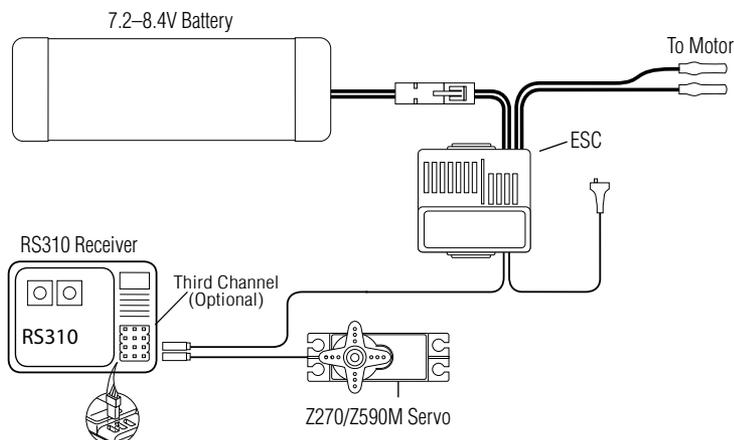

Receiver/Servo Connections and Installation

Your RS310 receiver should be installed as far away as possible from the vehicle's electric motor, speed control, battery, and related wires to minimize picking up any electrical noise. Keep the antenna wire away from graphite material and do not run it through any graphite material. The receiver should be mounted so it is isolated and floats on a cushioning foam material to avoid damage from shock or vibration. The placement of the RS310 receiver case should not come in direct contact with any hard or rigid surface.

1. Mount the RS310 receiver with double-sided tape. (Use extra layers of double-sided tape, particularly if it is thin, until you build up a cushioning pillow layer.)

Do **not** use glue to mount the receiver!

2. Run the antenna wire up through a plastic antenna tube and let the excess wire hang out the top of the tube.
3. Do not cut, coil, or bundle excess antenna wire—range will be reduced!

Operating Your Model

It's important to learn the proper sequence for switching on/off your radio system.


Before Operation

Switch on the transmitter, then the receiver.

After Operation

Switch off the receiver, then the transmitter. This ensures that you will always have a signal to the receiver and that your RC model will not operate out of control when you turn off the transmitter.


Servo Layout

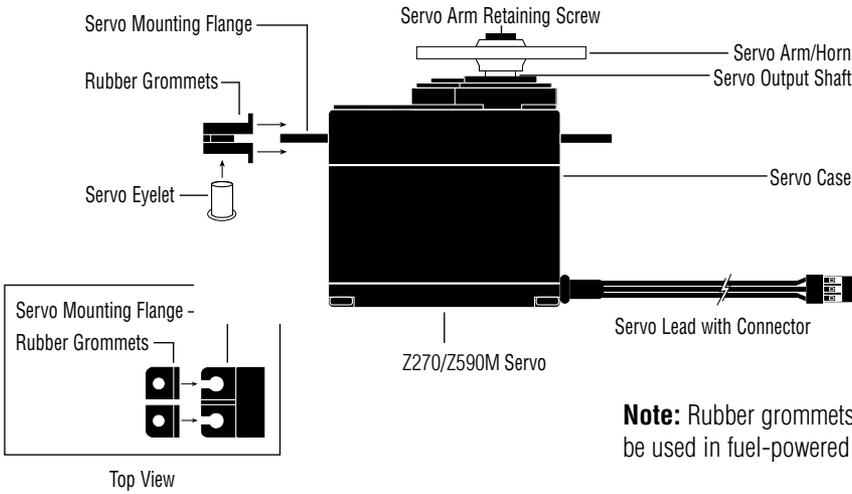

Note: Rubber grommets and eyelets must be used in fuel-powered vehicles.

Key Input and Display

To enter the System mode, press the *Scroll* and *Channel* keys simultaneously and hold while turning on the transmitter.



To enter the Function mode, press the *Scroll* key while the transmitter is on.



Press the *Increase* and *Decrease* keys simultaneously to clear the screen or return to factory preset.

KEY	USE
SCROLL	Moves up through the available functions
CHANNEL	Selects the desired channel
INCREASE	Increases the value of the selected function
DECREASE	Decreases the value of the selected function

Display Screens

Normal Display

When the power switch is turned on, the LCD screen will display the channel selected for signal transmission and transmitter battery pack voltage as shown below. This screen is referred to as the Normal Display. Pressing the *Channel* key will switch the display between the transmitting channel and model name.

Note: If any of the electronic trim buttons are moved while in this screen, the screen will automatically change to display the trim in use. This is called the Direct Trim mode. For more information on the feature, please see page 31 of this manual.



Up-Timer

Note: If the Lap-Timer is enabled, an up-timer display may alternatively be selected over the normal display screen by pressing the Channel key. Pressing the Channel key again will scroll back through the channel select and model name screens. (For more information on this feature, please see page 28.)



Low Battery/Lithium Battery Backup

When the voltage of the 8 "AA" batteries drops below 9.0V, the XS3 PRO's display screen will alternate between the Normal and Low-Battery screen (BAT), and a continuous beeping will occur, indicating that the batteries need to be replaced before further use. The Low-Battery screen is active during any operating modes.




Lithium Battery

Your XS3 PRO radio system is equipped with a five-year lithium battery backup system. This system is designed to protect and retain all radio programming in the event that the transmitter batteries drop below the required 9.0 volts, or the transmitter battery case is removed during battery changes. If after five years it becomes necessary to replace the lithium battery, return your system to the Horizon Service Center (see address, page 39) for repair.

Memory Backup

If the Memory Backup screen appears, this indicates the possibility of a ROM problem or the lithium battery is dead. If you switch the power off and on again, but the transmitter is in the default mode with all data lost, it is strongly suggested that the XS3 PRO transmitter be returned to the Horizon Service Center for servicing (see Warranty Information, page 39).

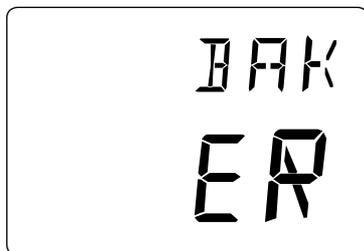


System Mode

Accessing System Mode

To enter the System mode, press the *Scroll* and *Channel* keys simultaneously while turning on the transmitter power switch. By pressing the *Scroll* key, you can now choose Model Select, Channel Select, Model Name Input, Frame Rate, Auxiliary Channel 3 function, Grip button C function, Data Reset or the Model Copy function. Information for each function is located on the page number listed next to the function name on the flow chart.

To exit the System mode, press the *Scroll* and *Channel* keys simultaneously or simply turn off the transmitter.


Note: If you turn the transmitter off and immediately enter System mode again, you will be returned to the last System mode function used instead of the Model Select function. While in System mode, there is no RF output generated by the transmitter. Adjustments can be performed with reduced battery power consumption. If you exit System mode by pressing the *Scroll* and *Channel* key at the same time, RF output will not be enabled until you first turn off the transmitter.

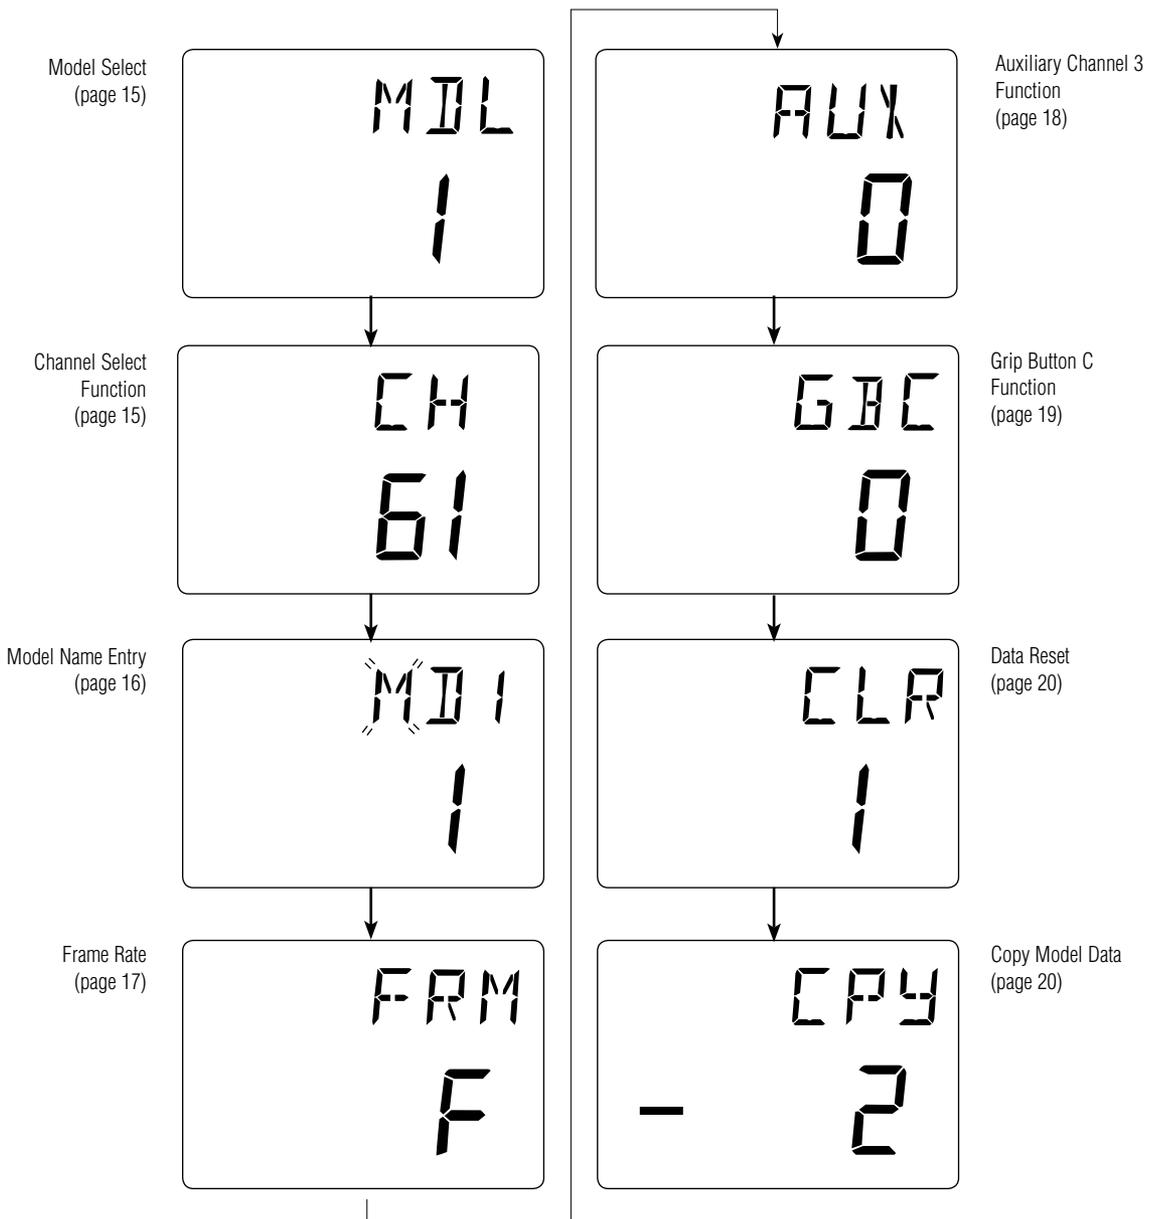


System Mode

Model Select


The XS3 PRO has memory for ten models. This feature allows for ten different models to be operated with the same transmitter (additional receivers and servos must be purchased separately) or one model with ten different race setups.

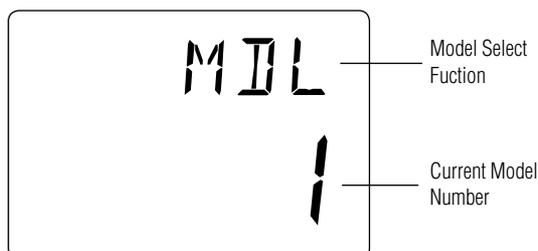

Accessing the Model Select Function



Press and hold the *Scroll* and *Channel* keys at the same time while turning transmitter power switch on.




Press the *Increase* or *Decrease* keys to select the desired model to be used (1, 2, 3,... or 10).

1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn the transmitter power switch on to enter System mode.
3. If “MDL” does not appear on the screen, press the *Scroll* key until “MDL” appears.
4. Press the *Increase* or *Decrease* keys to select the desired model number (1, 2, 3, ... or 10).
5. Press the *Scroll* key to access the Channel Select function.
6. To exit System mode, either turn the transmitter power switch off or press the *Scroll* and *Channel* keys at the same time.

Synthesized Channel Select

One of the XS3 PRO transmitter’s most valued features is its ability to synthesize the frequency needed for operation on a single select channel without the need for replacing a crystal. Depending on the operating frequency band of your transmitter, the XS3 PRO will either have 6 channels (1–6) on the 27MHz band or 30 channels (61–90) on the 75MHz band you can select from. (Please refer to the Frequency Chart on page 38 if you need to reference the exact frequency a particular channel is transmitting on.) When used in conjunction with the RS310 synthesized FM receiver, you will have access to virtually all available channels without needing to purchase any crystal sets!


Note: Your XS3 PRO radio system will only operate either on 27MHz or 75MHz, not both. While in System mode, there is no RF output being generated by the XS3 PRO enabling you to safely make the appropriate channel selection. You must turn the transmitter off and then back on to enable RF output.

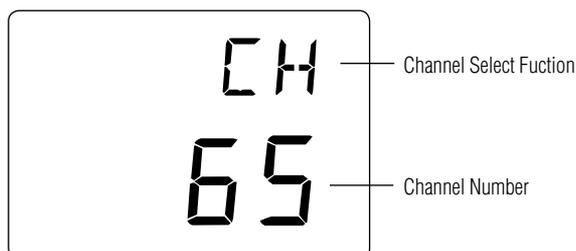

System Mode

Synthesized Channel Select cont.

Accessing the TX Channel Select Function



Press and hold the *Scroll* and *Channel* keys at the same time while turning transmitter power switch on. Next, press the *Scroll* key until “CH” appears.



Press the *Increase* or *Decrease* key to select the desired channel for transmission.

1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn the transmitter power switch on to enter System mode.
3. Press the *Scroll* key until “CH” appears on the screen.
4. Press the *Increase* or *Decrease* key to select the desired channel number 1–6 (27MHz) or 61–90 (75MHz).
5. Press the *Scroll* key to access the Model Name Entry function.
6. To exit System mode, either turn the transmitter power switch off or press the *Scroll* and *Channel* keys at the same time.

Accessing the RS310 RX Channel Select

Determine the frequency band and channels available marked next to the rotary dial matches the transmitter.



Set the channel on the RS310 receiver to match the XS3 PRO transmitter by adjusting the ten position rotary switches using the tuning screwdriver supplied until they point to the corresponding channel numbers.

- To set a 75MHz receiver to channel 78, rotate the first rotary switch to the “7” position and the second rotary switch to the “8” position.
- 27MHz receivers will only have one rotary switch for accessing channels 1–6. Use this single switch to select the desired channel.

Model Name Entry

The XS3 PRO allows a three-character name to be input for each of the ten models available. The current model with name will then be displayed in the Normal display screen.

This feature is useful to help identify different models, setups, etc.

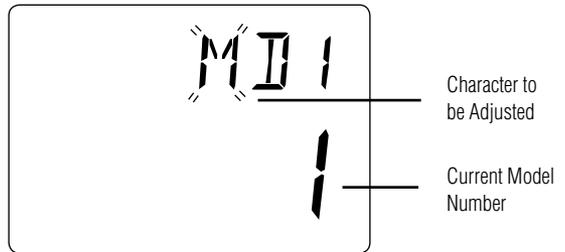

Press and hold the *Scroll* and *Channel* keys at the same time while turning transmitter power switch on. Next, press the *Scroll* key until the flashing “M” appears. Press the *Channel* key to select the character to be changed.



Press the *Increase* or *Decrease* keys to select the correct letter/number to be used.


Accessing the Model Name Entry Function

1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn on the transmitter power switch to enter the System mode.
3. Press the *Scroll* key until “MD1” appears on the screen with the first character flashing.
4. Press the *Increase* or *Decrease* keys to select the correct letter/number for the first character (flashing). To clear the character, pressing the *Increase* and *Decrease* keys at the same time.
5. To change the remaining two characters, press the *Channel* key until the desired character to be changed is flashing.
6. Press the *Scroll* key to access the Frame Rate function.
7. To exit the System mode, either turn the transmitter power switch off or press the *Scroll* and *Channel* keys at the same time.

System Mode


Frame Rate Select

The Frame Rate function allows you to select one of two transmitter frame rates available: Normal “N” - the default or Fast “F”. The Normal Frame Rate should be selected if you are using only non-digital servos. The Fast Frame Rate may be selected if you are using no analog and at least one digital servo.

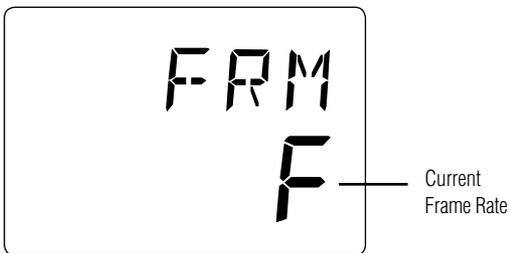

Note: The Frame Rate function offers quicker response times in the “F” or Fast mode. Some models of analog servos are not compatible in the “F” Fast mode and require the radio to be operated in the “N” Normal mode.

Accessing the Frame Rate Function



Press and hold the *Scroll* and *Channel* keys at the same time while turning the transmitter power switch on. Next, press the *Scroll* key until “FRM” appears.



Press the *Increase* or *Decrease* key to select the desired frame rate.

1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn on the transmitter power switch to enter the System mode.
3. Press the *Scroll* key until “FRM” appears on the screen.
4. Press the *Increase* or *Decrease* key to select the desired frame rate (N or F).
5. Press the *Scroll* key to access the Auxiliary Channel 3 function.
6. To exit the System mode, either turn the transmitter power switch off or press the *Scroll* and *Channel* keys at the same time.


System Mode

Auxiliary Channel 3 Function Select


The Auxiliary Channel 3 function of the XS3 PRO allows you to select from two different types of Channel 3 servo travel movements or to inhibit the Auxiliary Channel 3 function. Use the information below to select the correct Auxiliary Channel 3 function type for your particular installation. It is suggested the 0 function be selected for most applications.

(Factory preset)


0 = The 0 or Inhibit function allows the Brake End-Point Adjustment function to be used. This function is designed to be used with most types of electric and gas-powered RC cars. This feature is extremely popular, as it allows the amount of panic braking accessible through the throttle trigger's braking position to be adjusted during operations for maximum effectiveness. When activated, the braking values will be visible via the Direct Trim function, page 31.

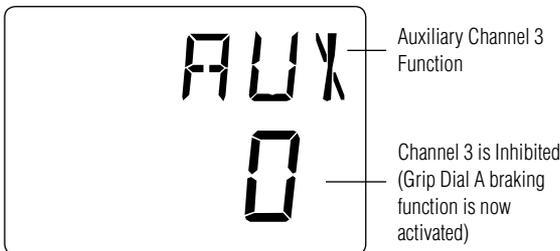

LN = The LN or linear servo travel function is designed to be used when an engine fuel mixture servo is required. This function is most commonly used with gas-powered RC racing boats and is accessible through Grip Dial A. In this function, the maximum travel of the servo is determined by the End-Point Adjustment function. The servo neutral position can be altered proportionally via the Grip Dial A for mixture adjustment. When activated, fuel mixture trim values are visible for the Direct Trim function, page 34.

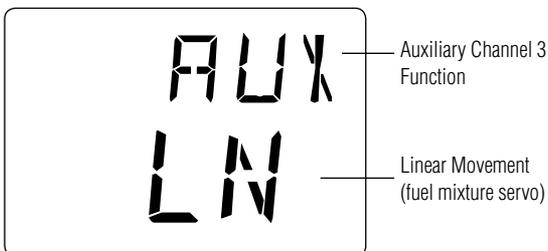

2P = The 2P or 2 position Servo Travel function is designed to be used as a transmission gear shift channel. This feature is designed for use with vehicles such as the Traxxas® T-Maxx. This function is accessible through Grip Button C or Grip Dial A if Grip Button C is occupied by another function. In this function, the servo's travel values are determined by the End-Point Adjustment function.

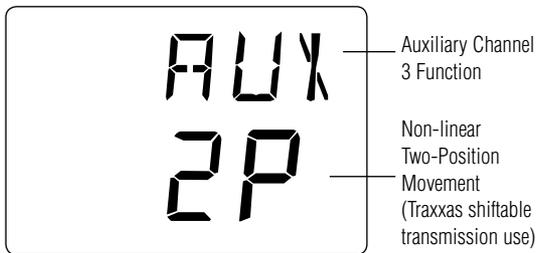

Accessing the Auxiliary Channel 3 Function

Press and hold the *Scroll* and *Channel* keys at the same time to enter the System mode. Next Press the *Scroll* key until "AUX" appears.


Press the *Increase* or *Decrease* key to select the desired Auxiliary channel 3 function type to be used.
 0 = Inhibited (Grip Dial A braking is active)
 LN = Linear servo movement
 2P = 2-position servo movement

1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn on the transmitter power switch to enter System mode.
3. Press the *Scroll* key until "AUX" appears on the screen.
4. Press the *Increase* or *Decrease* key to select the correct Auxiliary Channel 3 function type to be used.
5. Press the *Scroll* key to access the Grip Button C Select function.
6. To exit the System mode, either turn the transmitter power switch off or press the *Scroll* and *Channel* keys at the same time.

System Mode

Grip Button C Function Select

The Grip Button C function of the XS3 PRO allows you to select from 3 different functions available. Use the information below to select the correct Grip Button C assignment for your particular installation.

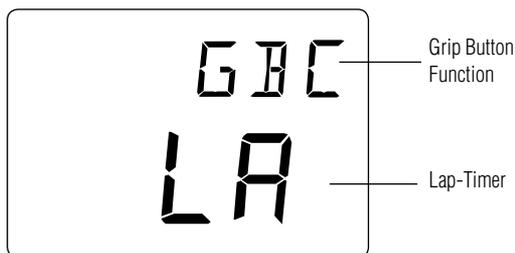

"0": Off. (Default) If "AUX" is "2P", then "2P" replaces "0" in this screen.


"Eb": ESB (Emergency Steering Button.) To cancel the "STG" regulation for panic steering.

"LA": Lap timer.


Note: If "LA" or "Eb" is selected and "2P" is assigned to the Auxiliary Channel 3 function, the Auxiliary Channel 3 function is moved to Grip Dial A.

(Factory preset)


0 = The 0, or off function, is the default setting and does not assign a function to Grip Button C. If the Auxiliary Channel 3 function is set to "2P" or 2-position, "2P" will appear in this screen in place of "0" and Grip Button C will function as the gear select button.

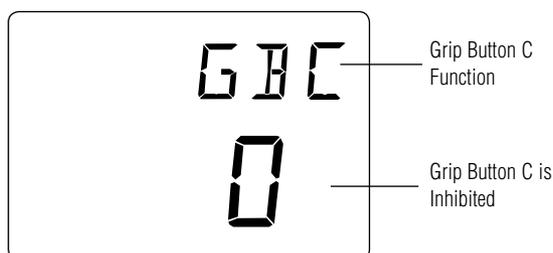

Eb = The Eb or Emergency Steering Button function is designed to override the value of Grip Dial B and provide 100% steering rate. This feature is useful if you have reduced the steering rate to make your vehicle easier to drive but need full steering in an emergency situation such as a collision.

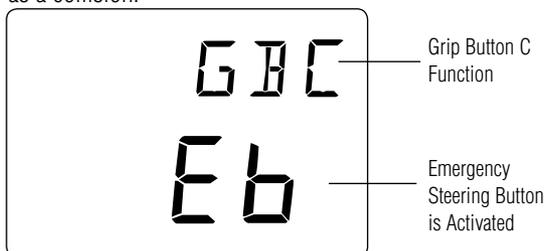

LA = The LA or Lap-Timer function is designed to be used when you want to enable the recording of individual lap time. The Lap-Timer function is described on page 28.

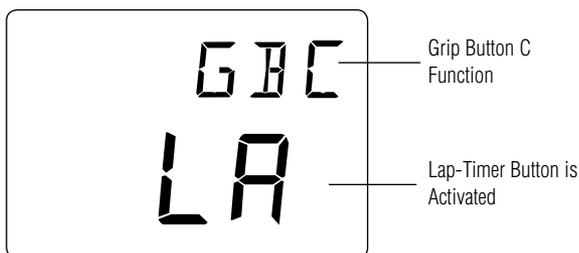

Accessing the Grip Button C Function

Press and hold the *Scroll* and *Channel* keys at the same time to enter the System Mode. Next Press the *Scroll* key until "GBC" appears.
 0 = Inhibited
 Eb = Emergency Steering Button
 LA = Lap-Timer

Press the *Increase* or *Decrease* key to select the desired Grip Button C function type to be used.

1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn on the transmitter power switch to enter System mode.
3. Press the *Scroll* key until "GBC" appears on the screen.
4. Press the *Increase* or *Decrease* key to select the correct Grip Button C function type to be used.
5. Press the *Scroll* key to access the Data Reset function.
6. To exit the System mode, either turn the transmitter power switch off or press the *Scroll* and *Channel* keys at the same time.


System Mode

Data Reset

The Data Reset function allows you to reset all the programming in the selected model (1, 2, 3, ... or 10) to the factory default settings. Before using the Data Reset function, it is important to enter the Model Select function and check to make sure the current model number indicated (1, 2, 3, ... or 10) is the model to which you want to reset to the factory default settings. The Model Select function is described on page 15.



Accessing the Data Reset Function



Press and hold the *Scroll* and *Channel* keys at the same time while turning the transmitter power switch on. Next, press the *Scroll* key until "CLR" appears.




Press the *Increase* and *Decrease* keys at the same time to reset (clear) all settings for the selected model to the factory default settings


1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn on the transmitter power switch to enter the System mode.
3. Press the *Scroll* key until "CLR" appears on the screen.
4. Press the *Increase* and *Decrease* keys at the same time to reset the data. To confirm that the selected model's programming has been reset, a beep will sound and the model number selected (1, 2, 3, ... or 10) will stop flashing.
5. Press the *Scroll* key to access the Copy Model Data function.
6. To exit the System mode, either turn the transmitter power switch off or press the *Scroll* and *Channel* keys at the same time.

Copy Model Data

Copy Model Data function allows you to copy the current model data into the model memory of the blinking model selected. Before using the Copy Model Data function, be sure you know what model number you want to copy the data to as all data in this selected model will be lost. If the current model being copied from uses the default name, the model name from the model being copied to will be retained.

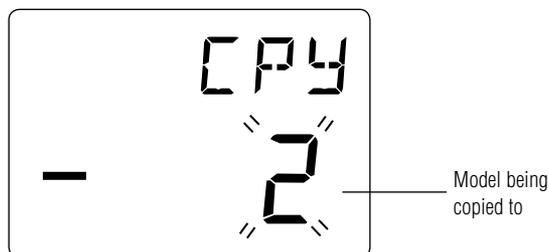

Accessing the Copy Model Data Function



Press and hold the *Scroll* and *Channel* keys at the same time while turning the transmitter power switch on. Next, press the *Scroll* key until "CPY" appears.



Press the *Increase* and *Decrease* keys at the same time to copy model data from the current model to the selected model.

1. Press the *Scroll* and *Channel* keys at the same time and hold.
2. Turn on the transmitter power switch to enter the System mode.
3. Press the *Scroll* key until "CPY" appears on the screen.
4. Press the *Increase* or *Decrease* key to select the desired model number you want the current model data copied to. This model number being select should be blinking.
5. Press the *Increase* and *Decrease* keys at the same time to copy the current model data into the selected model number. To confirm that the selected model has been copied to, a beep will sound and the model number selected (1, 2, 3, ... or 10) will stop flashing.
6. To exit the System mode, either turn the transmitter power switch off or press the *Scroll* and *Channel* keys at the same time.

Function Mode

Mode Key

RATE STM
100%

Steering Master Rate
(page 22)

TDB
R/B 0%

Throttle Deadband
(page 23)

EXP ST
LN

Channel Key

EPA ST
L/F 100

Channel Key

MIX STL
0%

Channel Key

LAP 40
20

Lap-Timer
(page 28)

TRIM STS
0

Channel Key

ST
REV • NORM

Channel Key

Channel Key

EXP THF
LN

Exponential
(page 24)

EPA TH
R/B 100

Channel Key

MIX THB
0%

Programmable Mixing
(page 27)

TRIM THS
0

Channel Key

TH
REV • NORM

Channel Key

Accessing the Function Mode

To enter the Function mode, turn on the transmitter. Press the *Scroll* key until a beep is heard. The display will change to show the first function listed on the Function Mode Flow Chart. Scroll down through the functions one by one. Once the desired function has been reached, use the *Channel* key to select the appropriate channel (if applicable). To adjust the values of the function, press the *Increase* (+) or *Decrease* (-) keys until the desired value is displayed. To exit function mode, press the *Scroll* and *Channel* keys simultaneously. The next time you enter Function mode, you will be returned to the last function accessed.

EPA AUX
L/F 100

End-Point Adjustment
(page 25)

TRIM AUS
0

Sub-Trim
(page 29)

AUX
REV • NORM

Servo Reversing
(page 30)


Function Mode

Steering Master Rate



The Steering Master Rate feature of the XS3 PRO allows the overall steering servo travel to be increased or decreased to the desired amount required. The value of the Steering Master Rate function is a percentage based on the travel adjust value set in the Travel Adjust section.

Example: Travel Adjust value 100%, Steering Master Rate value 80% - Maximum steering rate is now reduced to 80% of the maximum travel value (100%)

The Steering Master Rate function also works in conjunction with the Grip Lever B Steering Rate function (page 33) and acts as the maximum rate available through Grip Dial B. This feature allow the steering rate to be increased or decreased directly from the Grip Lever B while racing to maximize the steering rate needed for a particular track conditions.

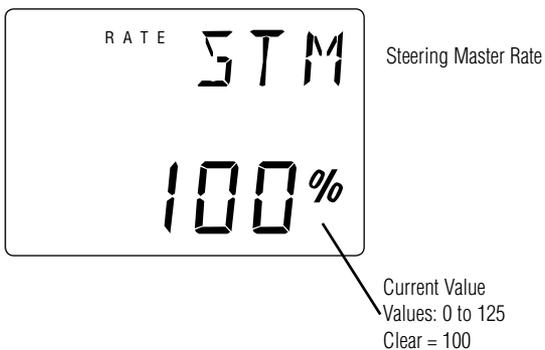

Accessing the Steering Master Rate Function




1. Turn the transmitter power switch on.
2. Press the *Scroll* key to access Function mode.
3. Press the *Scroll* key until RATE STM appears on the screen.
4. Press the *Increase* or *Decrease* keys until the proper (maximum) steering rate is achieved.
5. Press the *Scroll* key to access the Throttle Deadband function.
6. To exit the Function Mode, either turn off the transmitter power switch or press the *Scroll* and *Channel* keys at the same time.

Function Mode


Throttle Deadband

The throttle deadband feature is used to reduce/eliminate the dead throttle area that exists at neutral to the starting point of throttle and from neutral to the starting point of braking. This area is sometime known as deadband. As more throttle trim (also known as static brake) is applied, more of the dead trigger area right off neutral exists. To eliminate the throttle deadband, adjust a forward value such that your vehicle's wheels just start to turn when the trigger is slightly squeezed. This provides the most accurate feel and eliminates the dead area in the throttle. To eliminate the braking deadband, adjust the brake value such that your vehicle starts to slow down when the trigger is slightly pushed. This provides the most accurate brake feel and eliminates the dead area when braking.

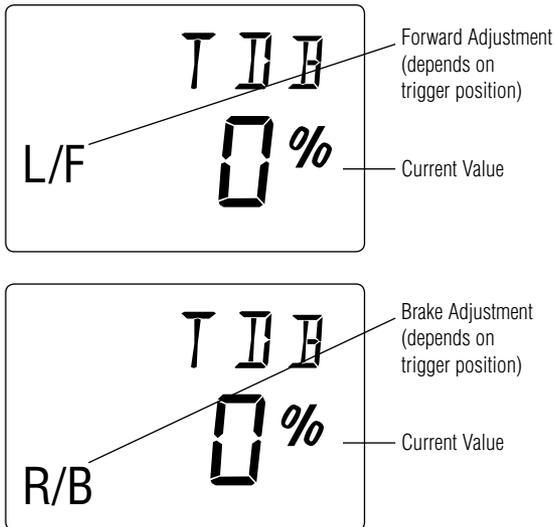

Values: 0% to 100%
Clear = 0%

Accessing the Throttle Deadband Function



Press the *Scroll* key until "TDB" appears on the screen.




Press the *Increase* or *Decrease* key to select the desired value necessary.

1. Turn the transmitter power switch on.
2. Press the *Scroll* key to access Function mode.
3. Press the *Scroll* key until "TDB" appears on the screen
4. Move the trigger accordingly to adjust the forward or braking deadband.
5. Press the *Increase* or *Decrease* key to select the desired value necessary to eliminate dead area.
6. Press the *Scroll* key to access the Exponential function.
7. To exit the Function mode, either turn off the transmitter power switch or press the *Scroll* and *Channel* keys at the same time.


Function Mode

Exponential Function


The Exponential feature of the XS3 PRO allows you to alter the response rate of the steering or throttle control around neutral without affecting the maximum amount of steering or throttle available. The adjustment range is from -100% to 0% (Linear) to +100%. Exponential is factory set to linear for both steering and throttle. Exponential is often used to settle down a car that is twitchy around center without giving up maximum steering response. The XS3 PRO provides both positive (increase sensitivity at neutral) and negative (decrease sensitivity at neutral) exponential values.

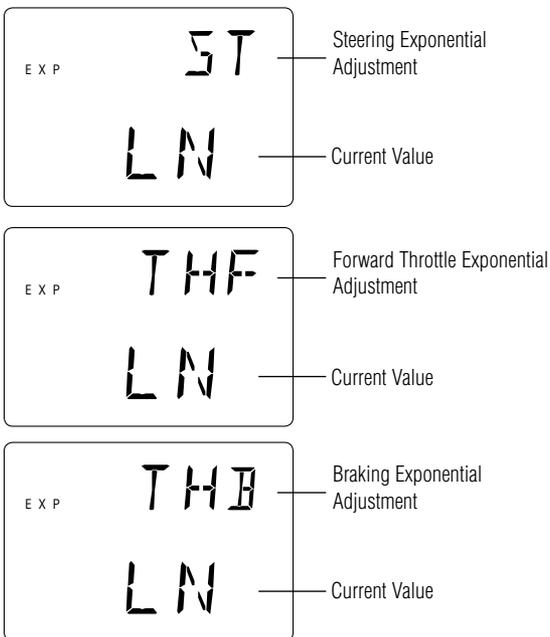

Accessing the Exponential Function



Press the *Scroll* key until "EXP" appears on the screen.



Press the *Increase* and *Decrease* keys to select the desired exponential value. Values: -100% to Linear (LN) to +100%.

1. Turn the transmitter power switch on.
2. Press the *Scroll* key to access the Function mode.
3. Press the *Scroll* key until "EXP" appears in small letters on the left side of the screen.
4. Press the *Increase* or *Decrease* keys to select the desired exponential value.
5. Press the *Scroll* key to access the travel End-Point Adjustment function.
6. To exit the Function mode, either turn off the transmitter power switch or press the *Scroll* and *Channel* keys at the same time.

Function Mode

End-Point Adjustment

The End-Point Adjustment feature of the XS3 PRO allows the maximum travel of both the steering, throttle and Auxiliary Channel 3 (optional) servos to be increased or decreased in each direction to achieve the exact servo movement needed. The End-Point Adjustment range is from 0% to 125% and is factory set to 100% for both channels. The value displayed on the screen depends on the current position of the steering wheel, trigger, or trim lever to be adjusted. This feature is very useful either to maximize servo travel or to reduce servo over-travel to eliminate servo binding (servo moves further than control mechanism allows), without the need for mechanical linkage adjustment.

The screens below are accessed by turning the wheel to the desired direction to be adjusted (left or right), by moving the trigger to the forward or backward (brake) position, or by moving the Grip Lever A to the forward or back positions.

Steering Left End-Point Adjustment

Current Value
Values: 0 to 125
Clear = 100

Steering Right End-Point Adjustment

Current Value
Values: 0 to 125
Clear = 100

Forward Throttle End-Point Adjustment

Current Value
Values: 0 to 125
Clear = 100

Backward Throttle (Brake) End-Point Adjustment

Current Value
Values: 0 to 125
Clear = 100

Channel 3 Screens (Optional)

Functions LN & 2P

Left/Right Travel Adjustment (function LN) or Forward Travel Adjustment (function 2P) accessible through Grip Button C

Current Value
Values: 0 to 190
Clear = 100

Functions 2P only


Rearward Travel Adjustment (function 2P) accessible through Grip Button C

Current Value
Values: 0 to 190
Clear = 100

Function Mode

Accessing The End-Point

Adjustment Function



Press the *Scroll* key until "EPA" appears on the screen. Press the *Channel* key to select the channel to be adjusted.



Move the wheel, trigger or Grip Button C in the desired direction and press either the *Increase* or *Decrease* keys to achieve the desired travel value.

1. Turn on the transmitter power switch.
2. Press the *Scroll* key to enter Function mode.
3. Press the *Scroll* key until "EPA" appears in small letters on the left side of the screen.
4. Press the *Channel* key to select the desired channel to be adjusted.

Steering = ST R/B (steering right) or ST L/F (steering left)

Throttle = TH L/F (forward) or TH R/B (braking or reverse)

Auxiliary Channel 3 (optional) = AUX L/F or AUX R/B (function 2P only)

5. Move the steering wheel, trigger or Grip Button C in the desired direction for adjustment (left/right, forward/reverse or brake). Press the *Increase* or *Decrease* key to achieve the desired amount of travel. Move the wheel, trigger or Grip Button C in the opposite direction to adjust the travel in the opposite direction.

Note: For Auxiliary Channel 3 function, if LN is selected, only L/F is adjustable.

6. Press the *Scroll* key to access the Mixing Adjustment function.
7. To exit the Function mode, either turn off the transmitter power switch or press the *Scroll* and *Channel* keys at the same time.

Note: When setting the end point adjustment values for the steering function, it is suggested that, if possible, the maximum travel values be set to an equal value in both directions to maintain proper steering control.

Function Mode

Programmable Mixing

The XS3 PRO offers two different mixing adjustments that allows for mixing one channel to another channel. The mixes available are Steering-to-Auxiliary Channel Mixing and Throttle-to-Auxiliary Channel Mixing. Each direction is independently adjustable. Popular use of this function includes 4-wheel steering and independent front and rear wheel brakes.



Steering-to-Auxiliary Channel Mixing Adjustment




Throttle-to-Auxiliary Channel Mixing Adjustment

For example, Throttle-to-Auxiliary channel mixing can be used for independent front and rear wheel brakes. Each time the throttle/brakes is moved, the auxiliary channel will move in the direction and to the value input being given by the throttle channel. Mixing is proportional, so small inputs to the throttle will result in small output from the auxiliary channel. The adjustment range is from -125% to 0% to 125%. If the rate is negative, the channel is mixed in the opposite direction.

Both mixes share a single mixing "offset." The purpose of the mixing offset is to redefine the neutral position of the auxiliary channel, which can be set using Grip Lever A when "LN" is selected in the Auxiliary Channel 3 function. If the "LN" selection is turned off in the Auxiliary Channel 3 function with a offset value currently present, the value will continue to act as a mixing offset until the value is either cleared or changed. If a mix is not required, it is strongly suggested the mixing rate be set for 0%, which is the default.

Accessing The Mixing Adjustment Function



Press the *Scroll* key until "MIX" appears on the screen. Press the *Channel* key to select the desired mix.



Move the wheel or trigger in the desired direction and press either the *Increase* or *Decrease* keys to achieve the desired mixing value.

1. Turn on the transmitter power switch.
2. Press the *Scroll* key to enter Function mode.
3. Press the *Scroll* key until "MIX" appears in the screen.
4. Press the *Channel* key to select the desired mix to be used.

STR or STL = Steering-to-Auxiliary Channel 3 Mixing.

THF or THB = Throttle-to-Auxiliary Channel 3 Mixing.

5. Move the steering wheel or trigger in the desired direction for adjustment (left/right, forward/reverse or brake). Press the *Increase* or *Decrease* key to achieve the desired amount of mixing. Move the wheel or trigger in the opposite direction to adjust the mixing in the opposite direction.
6. Press the *Scroll* key to access the Lap-Timer function (if enabled) or Sub-Trim function.
7. To exit the Function mode, either turn off the transmitter power switch or press the *Scroll* and *Channel* keys at the same time.

Function Mode

Lap-Timer

The Lap-Timer function of the XS3 PRO allows the recording of individual lap times based on a 999 second up-timer. Up to 50 laps and times from 3.0 to 99.9 seconds can be stored in memory for review at a later time. The Lap-Timer function will only be enabled and shown in Function mode if Grip Button C (System Mode) is set to "LA." With the Lap-Timer enabled, pressing the **Channel** key will alternate between the Normal display screen and Up-Timer display screen.

The Lap-Timer is started by pressing Grip Button C. Once active, as shown by the blinking word "LAP," pressing Grip Button C again will begin recording the time of the next lap.


Note: A 3.0 second lap is the quickest lap allowed. This prevents accidental double pushing of Grip Button C when recording lap times. If more than 50 laps are recorded, each new lap will overwrite the oldest lap held in memory.)

To stop the Lap-Timer, press the **Increase** and **Decrease** keys at the same time. To restart the Lap-Timer, press Grip Button C. To reset the Up-Timer, press the **Channel** key to show the Up-Timer display screen. With the Up-Timer stopped, press the **Increase** and **Decrease** keys at the same time to reset.

To review or reset lap times you must be in the Lap-Timer function mode screen. Upon entering this function, the screen will always show the last lap time recorded. Use the **Increase** or **Decrease** keys to view the desired lap(s).



Note: If a recorded lap time is greater than 99.9 seconds, "OVR" will be displayed.)

To reset all lap times, press the **Increase** and **Decrease** keys at the same time.

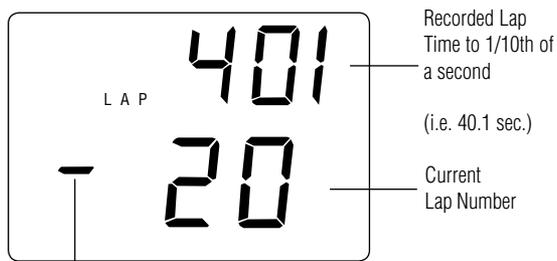

A minus sign indicates a pre-existing lap. Current lap times have no sign.

Accessing The Lap-Timer Function




1. Turn on the transmitter power switch.
2. Press the **Scroll** key to enter Function mode.
3. Press the **Scroll** key until "LAP" appears in the screen.
4. Press the **Increase** or **Decrease** keys to view the desired lap time(s).
5. To reset all lap times press the **Increase** and **Decrease** keys at the same time.
6. Press the **Scroll** key to access the Sub-Trim function.
7. To exit the Function mode, either turn off the transmitter power switch or press the **Scroll** and **Channel** keys at the same time.

Function Mode

Sub-Trim


The Sub-Trim function of the XS3 PRO is an electronic trimming feature that allows the neutral position of the servo on either the steering, throttle or auxiliary channel (optional) to be moved, while allowing the electronic trim lever for that channel to remain in the center position. This feature is very useful as it allows the servo arm/wheel position to be moved to help with control linkage installation, eliminating the need to make mechanical linkage adjustments.

Although the Sub-Trim function is a very useful feature, it is suggested that only small amounts of sub-trim be used so that no unwanted, non-equal servo travel is created. It is suggested that less than 30 points of Sub-Trim be used during adjustment. If more than 30 points of Sub-Trim are required, it is suggested that a mechanical linkage adjustment be performed.

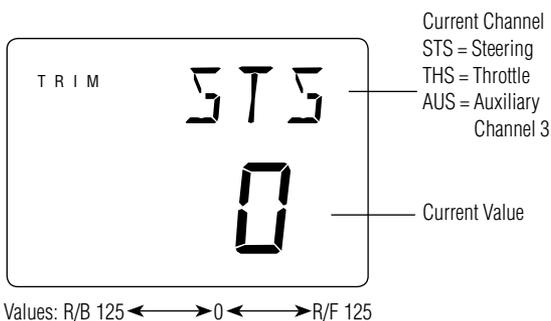

Accessing the Sub-Trim Function

Press the *Scroll* key until "TRIM" appears on the screen. Press the *Channel* key to select the desired channel to be adjusted.



STS = Steering
THS = Throttle
AUS = Auxiliary Channel 3

Press the *Increase* or *Decrease* keys to achieve the desired Sub-Trim Value.




1. Turn on the transmitter power switch.
2. Press the *Scroll* key to enter Function mode.
3. Press the *Scroll* key until "TRIM" appears in small letters to the left of the screen.
4. Press the *Channel* key to select the channel to be adjusted (Steering, Throttle or Auxiliary Channel 3).
5. Press the *Increase* or *Decrease* keys until the proper servo position is achieved.
6. Press the *Scroll* key to access the Servo Reversing function.
7. To exit the Function mode, either turn off the transmitter power switch or press the *Scroll* and *Channel* keys at the same time.

Function Mode

Servo Reversing

The Servo Reversing feature of the XS3 PRO is a very convenient feature used when setting up a new model. The purpose of the servo reversing function is to change the direction of the servo rotation in relation to the wheel/trigger movement. The Servo Reversing function is available for the steering, throttle and Auxiliary Channel 3 of the XS3 PRO.

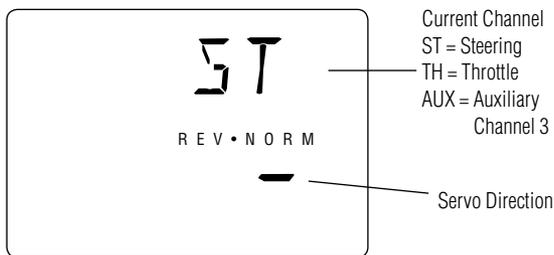

1. Turn the transmitter power switch on.
2. Press the *Scroll* key to access Function Mode.
3. Press the *Scroll* key until "REV-NORM" appears in small letters to the right of the screen.
4. Press the *Channel* key to select the channel to be changed (ST = Steering, TH = Throttle, AUX = Auxiliary Channel 3).
5. Press the *Increase* or *Decrease* keys to move the cursor to the desired direction.
6. To exit the Function mode, either turn off the transmitter power switch or press the *Scroll* and *Channel* keys at the same time.

Accessing the Servo Reversing Function

Press the *Mode* key until "REV. NORM" appears on the screen. Press the *Channel* key to select the desired channel to be adjusted.

ENTER
SCROLL CHANNEL


ST = Steering
TH = Throttle
AUX = Auxiliary Channel 3

CLEAR
INCREASE DECREASE

Press the *Increase* or *Decrease* keys to move the cursor to the desired servo direction.

Accessing the Direct Trim Mode


The Direct Mode function of the XS3 PRO is accessible through the use of the electronic throttle or steering trim levers, as well as the two electronic grip levers (A&B) located on the upper portion of the grip handle. This function allows for quick trim adjustment of these controls.

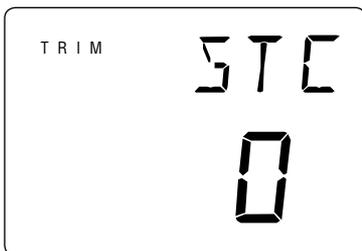

Steering Trim
(page 32)



Throttle Trim
(page 32)

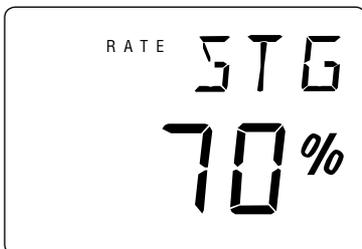

Steering Dual-Rate
(Grip Lever B)
(page 33)

To access the Direct Trim Mode function, turn on the transmitter power switch. Next, move the desired trim lever to be adjusted. The appropriate screen for the selected trim lever will be displayed. To adjust, simply move the trim lever in the desired direction until the correct amount of trim is achieved. Once the desired trim is achieved, the screen will return to the Normal display screen after approximately two seconds from the last trim input. If the *Increase* or *Decrease* keys are pressed any time during the two seconds, the system will return to the previous screen in use.

Only present when Aux. function "0" is selected



Brake Travel Adjustment
(Grip Lever A), (page 34)
(Only visible when the
Auxiliary Channel 3
function "0" has been
selected.) Refer to
Auxiliary Channel 3
function, page 18, for
clarification.

*

Only present when Auxiliary function "LN" is selected




Auxiliary Channel 3
Trim Adjustment
(LN mode only)
Refer to Auxiliary
Channel 3 function,
page 34, for
clarification.

*

***Note:** When Auxiliary Channel 3 function 2P is selected, the two screens above are not present.


Steering Trim

The XS3 PRO electronic Steering Trim lever, located above the steering wheel, allows the center position of the servo to move in either direction. Steering travel end-point adjustment values remain completely independent from the steering trim, unless the trim value exceeds the selected end-point values. (For example, if trim values are set at 30 and end-point values at 15, steering trim will over-ride/alter the end-point value.) Each click will provide 0.3° of trim to the center of the steering servo with a maximum of 12° allowed.

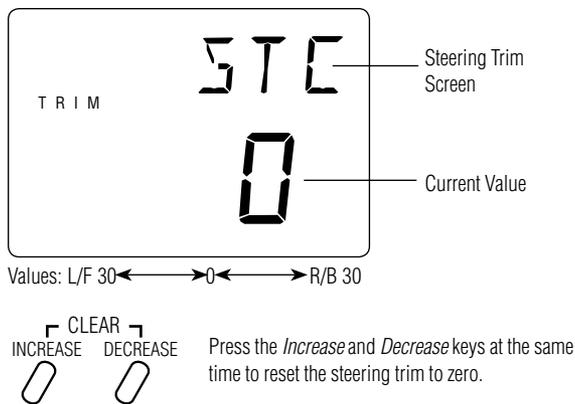


Note: Each click will not always result in a change of the value displayed.

To adjust the steering trim servo position, move the electronic Steering Trim lever left or right. As soon as the trim is moved, the “STC” Steering Trim screen will be displayed unless the trim lever is untouched for two seconds. To reset the trim value to 0, press the *Increase* and *Decrease* keys at the same time while the “STC” screen is displayed.

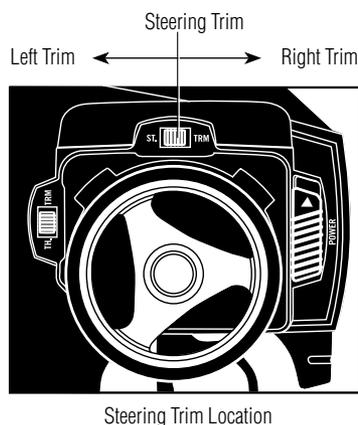

Throttle Trim


The XS3 PRO's electronic Throttle Trim lever, located to the left of the steering wheel, allows the center position of the servo to move in either direction. Throttle end-point adjustment values remain completely independent from the throttle trim, unless the trim value exceeds the selected end-point values. (For example, if the trim value is set at 40 and the end-point values at 30, Throttle Trim will override/alter the end-point value.)

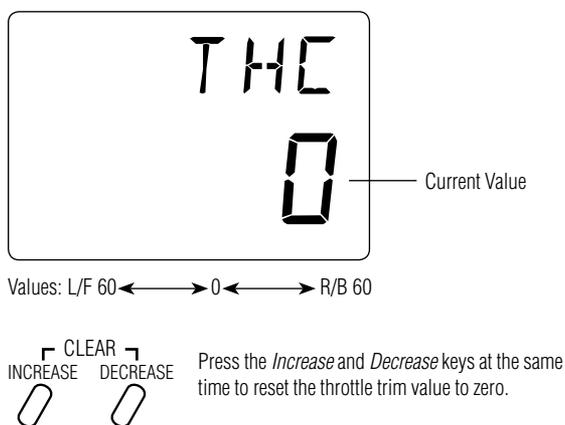

Each click will provide 0.3° of trim to the throttle servo with a maximum of 24° allowed.



Note: Each click will not always result in a change of the value displayed.

To adjust the Throttle Trim servo position, move the electronic steering trim lever either up or down. As soon as the trim is moved, the “THC” Throttle Trim screen will appear and will continue to be displayed unless the trim lever is untouched for a period of two seconds. To reset the trim value to zero, press the *Increase* and *Decrease* keys at the same time while the “THC” screen is displayed.

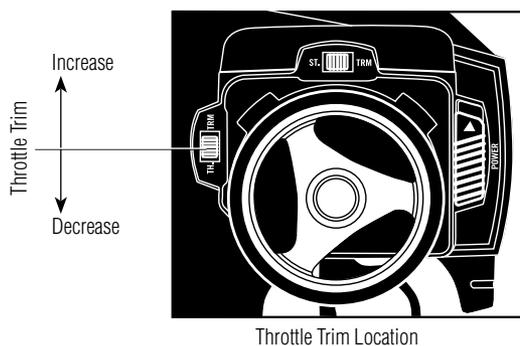

Grip Lever B: Steering Dual-Rate Trim Adjustment

The Steering Dual-Rate adjustment, located at Grip Lever B, allows the Dual-Rate value (maximum servo travel) to be increased or decreased within a range from 100% through 20% of the total end point value established in the steering EPA function. This function is very useful in race conditions as it allows you to custom tailor the steering radius and sensitivity for the current track conditions.

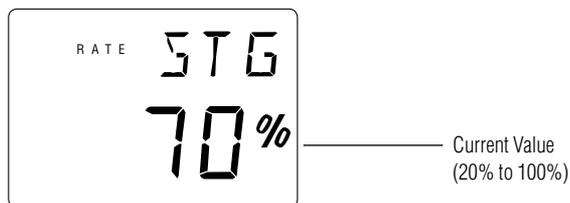


Press the *Increase* and *Decrease* keys at the same time to reset the steering dual rate trim to the factory preset (70%).

Please note that since the Dual-Rate value shown in the "STG" screen is the percentage of the end-point value established in the Steering EPA function, the value will not always increase or decrease each time Grip Lever B is moved.

If the Emergency Steering button function (page 19) is active, pressing Grip Button C will restore the steering dual rate to 100% until the button is released.


To adjust the Steering Dual-Rate value, move the electronic Grip Lever B either left (-) or right (+). As soon as the trim is moved, the "STG" Steering Dual-Rate screen will appear and will continue to be displayed unless the Grip Lever B is untouched for a period of two seconds. To reset the trim value to the factory preset setting of 70%, press the *Increase* and *Decrease* keys at the same time while the "STG" screen is displayed.

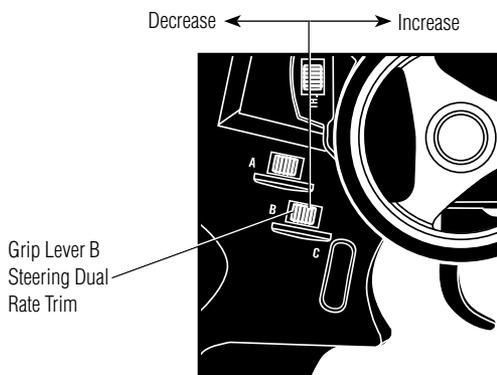

Grip Lever A: Brake End-Point Adjustment/Auxiliary Channel 3 Access

Brake End-Point Adjustment


The Brake End-Point Adjustment, located at Grip Lever A, allows the maximum servo travel on the braking side of the throttle trigger to be increased or decreased from 100% to 0% (off). This function is very useful in race conditions as it allows the racer to custom tailor the “panic” brake value to maximize the car’s braking power for the current track conditions. Please note that since the Brake End-Point value shown in the “BRK” screen is a percentage of the total braking value established in the End-Point Adjustment function (page 25), the value will not always increase or decrease each time the Grip Lever A is moved.

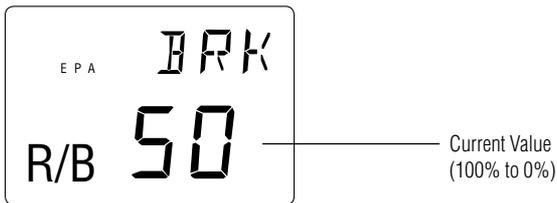

Note: If Grip Lever A is assigned an Auxiliary Channel 3 function by selecting “LN” or “2P” with Grip Button C in use, the Brake End-Point Adjustment will not be available.

Hint: Set the Brake End-Point Adjustment to 100% before making mechanical brake linkage adjustments and before you program any electronic speed control. This will ensure maximum brake travel is available.

To adjust the brake endpoint value, move the electronic Grip Lever A either left (-) or right (+). As soon as the grip lever is moved, the BRK End-Point Adjustment screen will appear and will continue to be displayed unless the Grip Lever A is untouched for a period of two seconds.

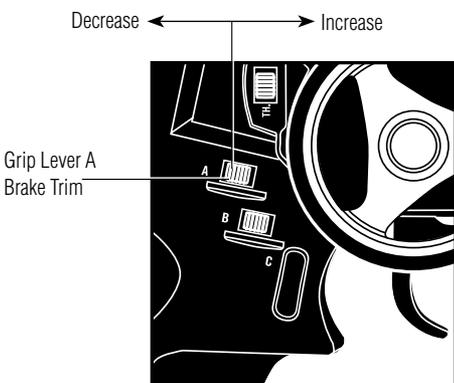


Move the grip lever A to the left or right to decrease or increase values.

Fuel Mixture

When selected, Grip Lever A can be used to access the Auxiliary Channel 3 function of the XS3 PRO for use as a fuel mixture channel.

Auxiliary Channel 3 Fuel Mixture Control (LN selected)

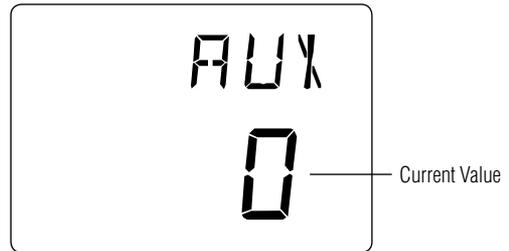

When the LN (linear) Auxiliary Channel 3 function is selected, Grip Lever A can be used to change the neutral position of the servo to lean or richen the engine’s fuel mixture. Once the desired fuel mixture has been achieved, the Grip Lever A value indicated on this screen can be transferred manually to the Sub-Trim function and the value of the AUX screen can be returned to zero. Please refer to diagram A below for proper grip lever operation.

Transmission Shift Selector

When the 2P Auxiliary Channel function is selected, the Grip Lever A can be used to move the Auxiliary 3 Channel servo to one of two positions (left/right or forward/reverse) when LA or Eb is selected for the Grip Button C function. Please refer to diagram A below for proper shifting procedures.

Note: The End-Point Adjustment function is used to set the forward and reverse gear servo travel positions.

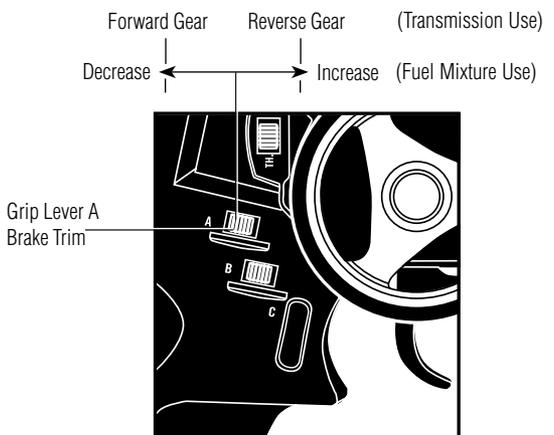


Diagram A

XS3 PRO Data Sheet

System Mode

MODEL NUMBER	1 2 3 4 5 6 7 8 9 10
CHANNEL #	
MODEL NAME	
FRAME RATE	N/F
AUX FUNCTION	O/2P/LN
GRIP BUTTON C	O/Eb/LA

Function Mode

	STEERING	THROTTLE	AUX
STEERING MASTER RATE	_____ %		
THROTTLE DEADBAND		F _____ % B _____ %	
EXPONENTIAL	_____ %	F _____ % B _____ %	
END-POINT ADJUSTMENT	L _____ R _____	F _____ B _____	L _____ R _____
MIXING	L _____ % R _____ %	F _____ % B _____ %	
SUB-TRIM			
SERVO REVERSING	REV/NORM	REV/NORM	REV/NORM

Direct Mode

TRIM VALUES	STEERING -/+	THROTTLE -/+	AUX. CHANNEL 3 -/+
GRIP LEVER B STEERING D/R	_____ %		
GRIP LEVER A VALUES		BRAKE EPA	AUX FUNCTION "LN"

System Mode

MODEL NUMBER	1 2 3 4 5 6 7 8 9 10
CHANNEL #	
MODEL NAME	
FRAME RATE	N/F
AUX FUNCTION	O/2P/LN
GRIP BUTTON C	O/Eb/LA

Function Mode

	STEERING	THROTTLE	AUX
STEERING MASTER RATE	_____ %		
THROTTLE DEADBAND		F _____ % B _____ %	
EXPONENTIAL	_____ %	F _____ % B _____ %	
END-POINT ADJUSTMENT	L _____ R _____	F _____ B _____	L _____ R _____
MIXING	L _____ % R _____ %	F _____ % B _____ %	
SUB-TRIM			
SERVO REVERSING	REV/NORM	REV/NORM	REV/NORM

Direct Mode

TRIM VALUES	STEERING -/+	THROTTLE -/+	AUX. CHANNEL 3 -/+
GRIP LEVER B STEERING D/R	_____ %		
GRIP LEVER A VALUES		BRAKE EPA	AUX FUNCTION "LN"

XS3 PRO Data Sheet

System Mode

MODEL NUMBER	1 2 3 4 5 6 7 8 9 10
CHANNEL #	
MODEL NAME	
FRAME RATE	N/F
AUX FUNCTION	O/2P/LN
GRIP BUTTON C	O/Eb/LA

Function Mode

	STEERING	THROTTLE	AUX
STEERING MASTER RATE	_____ %	_____ %	_____ %
THROTTLE DEADBAND	_____ %	F _____ % B _____ %	_____ %
EXPONENTIAL	_____ %	F _____ % B _____ %	_____ %
END-POINT ADJUSTMENT	L _____ R _____	F _____ B _____	L _____ R _____
MIXING	L _____ % R _____ %	F _____ % B _____ %	_____ %
SUB-TRIM			
SERVO REVERSING	REV/NORM	REV/NORM	REV/NORM

Direct Mode

TRIM VALUES	STEERING -/+	THROTTLE -/+	AUX. CHANNEL 3 -/+
GRIP LEVER B STEERING D/R	_____ %	_____ %	_____ %
GRIP LEVER A VALUES	_____ %	BRAKE EPA	AUX FUNCTION "LN"

System Mode

MODEL NUMBER	1 2 3 4 5 6 7 8 9 10
CHANNEL #	
MODEL NAME	
FRAME RATE	N/F
AUX FUNCTION	O/2P/LN
GRIP BUTTON C	O/Eb/LA

Function Mode

	STEERING	THROTTLE	AUX
STEERING MASTER RATE	_____ %	_____ %	_____ %
THROTTLE DEADBAND	_____ %	F _____ % B _____ %	_____ %
EXPONENTIAL	_____ %	F _____ % B _____ %	_____ %
END-POINT ADJUSTMENT	L _____ R _____	F _____ B _____	L _____ R _____
MIXING	L _____ % R _____ %	F _____ % B _____ %	_____ %
SUB-TRIM			
SERVO REVERSING	REV/NORM	REV/NORM	REV/NORM

Direct Mode

TRIM VALUES	STEERING -/+	THROTTLE -/+	AUX. CHANNEL 3 -/+
GRIP LEVER B STEERING D/R	_____ %	_____ %	_____ %
GRIP LEVER A VALUES	_____ %	BRAKE EPA	AUX FUNCTION "LN"

XS3 PRO Data Sheet

System Mode

MODEL NUMBER	1 2 3 4 5 6 7 8 9 10
CHANNEL #	
MODEL NAME	
FRAME RATE	N/F
AUX FUNCTION	O/2P/LN
GRIP BUTTON C	O/Eb/LA

Function Mode

	STEERING	THROTTLE	AUX
STEERING MASTER RATE	_____ %		
THROTTLE DEADBAND		F _____ % B _____ %	
EXPONENTIAL	_____ %	F _____ % B _____ %	
END-POINT ADJUSTMENT	L _____ R _____	F _____ B _____	L _____ R _____
MIXING	L _____ % R _____ %	F _____ % B _____ %	
SUB-TRIM			
SERVO REVERSING	REV/NORM	REV/NORM	REV/NORM

Direct Mode

TRIM VALUES	STEERING -/+	THROTTLE -/+	AUX. CHANNEL 3 -/+
GRIP LEVER B STEERING D/R	_____ %		
GRIP LEVER A VALUES		BRAKE EPA	AUX FUNCTION "LN"

System Mode

MODEL NUMBER	1 2 3 4 5 6 7 8 9 10
CHANNEL #	
MODEL NAME	
FRAME RATE	N/F
AUX FUNCTION	O/2P/LN
GRIP BUTTON C	O/Eb/LA

Function Mode

	STEERING	THROTTLE	AUX
STEERING MASTER RATE	_____ %		
THROTTLE DEADBAND		F _____ % B _____ %	
EXPONENTIAL	_____ %	F _____ % B _____ %	
END-POINT ADJUSTMENT	L _____ R _____	F _____ B _____	L _____ R _____
MIXING	L _____ % R _____ %	F _____ % B _____ %	
SUB-TRIM			
SERVO REVERSING	REV/NORM	REV/NORM	REV/NORM

Direct Mode

TRIM VALUES	STEERING -/+	THROTTLE -/+	AUX. CHANNEL 3 -/+
GRIP LEVER B STEERING D/R	_____ %		
GRIP LEVER A VALUES		BRAKE EPA	AUX FUNCTION "LN"

Frequency Chart

FREQUENCY (MHz)	CHANNEL	FREQUENCY (MHz)	CHANNEL	FREQUENCY (MHz)	CHANNEL
26.995.....	1	75.530.....	67	75.770.....	79
27.045.....	2	75.550.....	68	75.790.....	80
27.095.....	3	75.570.....	69	75.810.....	81
27.145.....	4	75.590.....	70	75.830.....	82
27.195.....	5	75.610.....	71	75.850.....	83
27.255.....	6	75.630.....	72	75.870.....	84
75.410.....	61	75.650.....	73	75.890.....	85
75.430.....	62	75.670.....	74	75.910.....	86
75.450.....	63	75.690.....	75	75.930.....	87
75.470.....	64	75.710.....	76	75.950.....	88
75.490.....	65	75.730.....	77	75.970.....	89
75.510.....	66	75.750.....	78	75.990.....	90

Warranty and Service Information

Note: Be sure to keep your original dated sales receipt in a safe place as you will be required to provide proof of purchase date for the equipment to be serviced under warranty.

Warranty Coverage

Your new JR Remote Control Radio System is warranted to the original purchaser against manufacturer defects in material and workmanship for 3 years from the date of purchase. During this period, Horizon Service Center will repair or replace, at our discretion and at no cost to the purchaser, any component that is found to be factory defective. This warranty is limited to the original purchaser of the unit and is not transferable.

This warranty does not apply to any unit that has been improperly installed, mishandled, abused or damaged in a crash or to any unit that has been repaired or altered by any unauthorized agencies. Under no circumstances will the buyer be entitled to consequential or incidental damages. This limited warranty gives you specific legal rights; you also have other rights that may vary from state to state. As with all fine electronic equipment, do not subject your radio system to extreme temperatures, humidity or moisture. Do not leave it in direct sunlight for long periods of time.

Repair Service Directions

In the event that your JR radio needs service, please follow the instructions listed below.

1. Check all on/off switches to be sure they are off. This will speed the repair process of checking battery condition.
2. Return your system components only (transmitter, receiver, servos, etc.). Do not return your system installed in a model car, boat, etc.
3. Preferably, use the original carton/packaging (molded foam container) or equivalent to ship your system. Do not use the system carton itself as a shipping carton. You should package the system carton within a sturdy shipping container using additional packing material to safeguard against damage during transit. Include complete name and address information inside the carton, as well as clearly writing it on the outer label/return address area.
4. Include detailed information explaining your operation of the system and problem(s) encountered. Provide an itemized list of equipment enclosed and identify any particular area/function, which may better assist our technicians in addressing your concerns. Date your correspondence and be sure your complete name and address appear on this enclosure.
5. Include your name, mailing address and a phone number where you can be reached during the business day.
6. Within your letter, advise us of the payment method you prefer to use. The Horizon Service Center accepts only VISA or MasterCard. Please include your card number and expiration date.

Warranty Repairs

To receive warranty service, you must include your original dated sales receipt to verify your proof-of-purchase date. Providing that warranty conditions have been met, your radio will be repaired without charge.

Normal Non-Warranty Repairs

Should your repair cost exceed 50% of the retail purchase cost, you will be provided with an estimate advising you of your options. Ship your system to:

Horizon Service Center
4105 Fieldstone Road
Champaign, IL 61822
Phone: (217) 355-9511



JRPM130

©Copyright 2004 Horizon Hobby, Inc.